

# OPTISPAN MAJOR MKII



Semi-cut off




Aeroscreen




## PRODUCT DIMENSIONS

### Semi-cut off

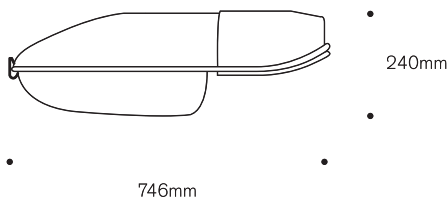

### Aeroscreen

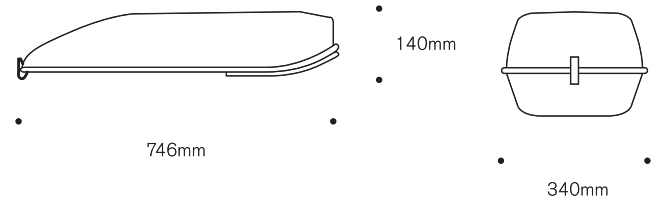


## FEATURES

- Optispan fittings are designed to meet all Australian major road lighting standards
- A robust design die-cast aluminium body with either standard lens or Aeroscreen flat glass
- Suitable for HID lamps up to 400W
- Optispan MK II luminaires include a hinged top access control gear cover for easy accessibility for product maintenance
- Optispan Aeroscreen features a flat glass lens with tubular HID lamps, for low glare performance. Suitable around airports and highway flyovers or where stray lights could be hazardous

## APPLICATIONS

- Freeway Access Ramps
- Arterial Roads
- Major Intersections
- Highways
- Dual Carriageways
- Bridges
- Roundabouts
- Security

## PHOTOMETRIC DESIGN DATA

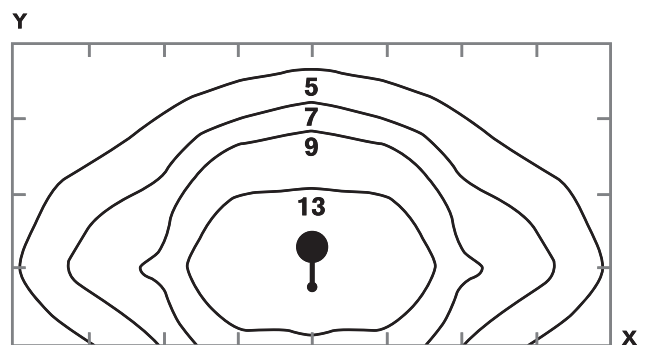

### Horizontal illumination - OPTISPAN OPN150SG

Mounting height - 10.5m

Area - 40m x 20m

X increments - 5.0m

Y increments - 5.0m

Plane height - 0.0m

Aiming angle - 5°

Windage - 0.133m<sup>2</sup>

Weight - 9.00kg

Wired to AS3137 and EMC approved

Fits 32mm nominal bore pipe bracket or 40mm as an option.

PE model complete with PE base only